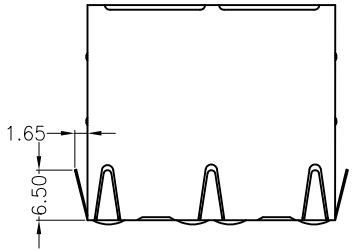



LED SCHEMATIC

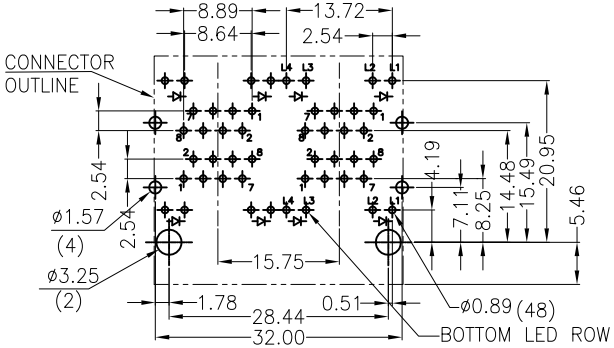

PCB LAYOUT TOLERANCE:±0.05



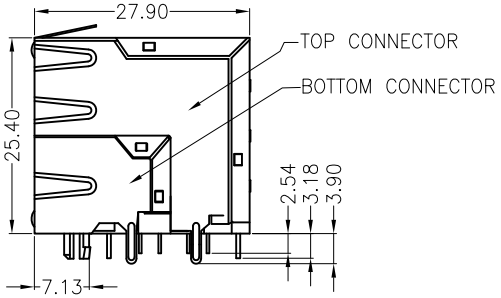



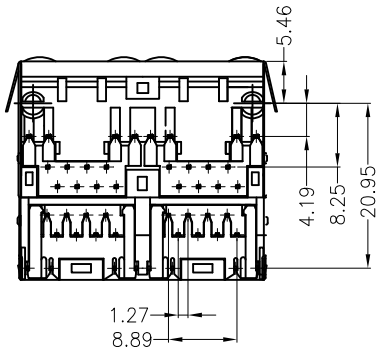

NOTES:
1.MATERIAL:
HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,PBT/NY6T(PA6T)UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.35MM.
SHELL:BRASS,T=0.25MM.
2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDERTAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
SHELL: T=0.25mm COPPER ZINC ALLOY PLATED WITH NICKEL
3.OPERATING TEMPERTURE:-40°C~+85°C.
4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

PART NUMBER:

JM2-C D 1 4-2 1 0 0
- D: TWO TYPES W/ALL SPRING/W/O LOGO
- 1: Housing PBT
- LED CODE
- PLATING CODE: 2-GOLD PLATED 3u"
- DIM CODE
- 0: 兩件式鐵殼

CODE	Contact PIN DIM A	LED PIN DIM B
1	2.54	3.18

	Left LED#2		Right LED#1	
	L4+ L3-	L4- L3+	L2+ L1-	L2- L1+
4	GR		YE	

REV.	ECN. NO.	DRAWN	DATE
A	NEW	LIUBAO	12/21/2013

ECONN Technology
ECONN CORPORATION

HSF Compliant

ⓧ:QUALITY CONTROL ITEM	
APPROVED	
CHECKED	
DRAWN	

GENERAL TOLERANCE
.X± 0.38 X.°± 2°
.XX± 0.25 .X°± 1°
.XXX± 0.13

PART NO.: JM2-CD14-2100
TITLE: RJ45 CONNECTOR JM2*2PORT W/LED, 8P8C, Shielded, Thru-Hole

UNIT: mm | SCALE: 1:1 | SHEET: 1/1 | REV.: A

SIZE: A4

說明: △ :備註 ◇ :版本變更 Ⓝ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

DOCUMENT NO. : ZER0013/A.2