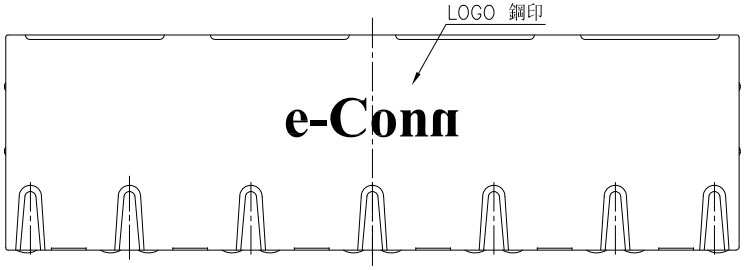

LED SCHEMATIC:

LEFT LED1:
LEFT LED2:



RIGHT LED1:
RIGHT LED2:



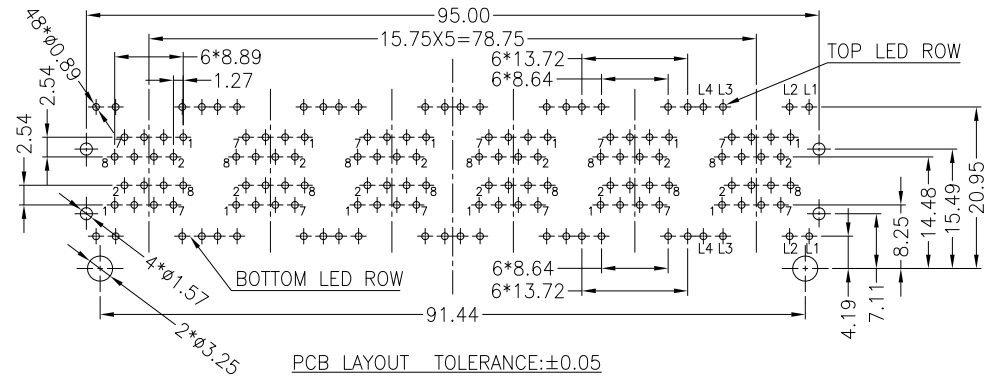

PCB LAYOUT TOLERANCE:±0.05
(TOP VIEW)

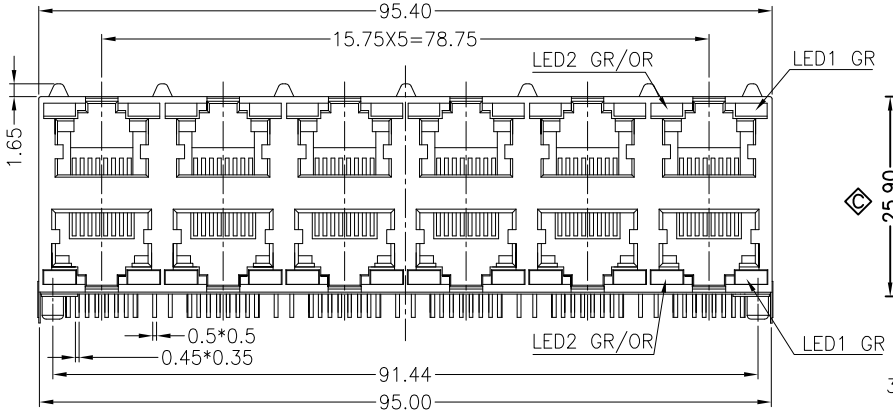

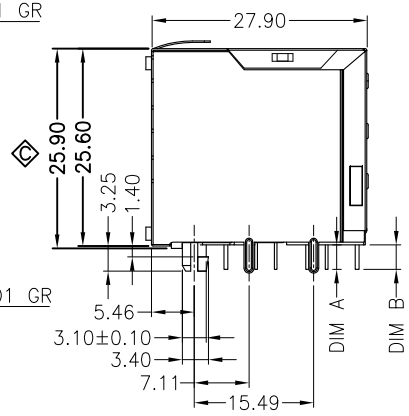

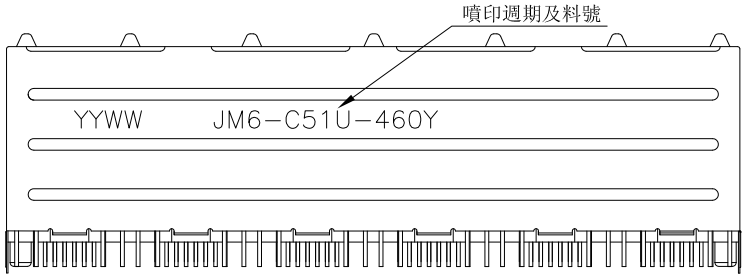

BACK VIEW

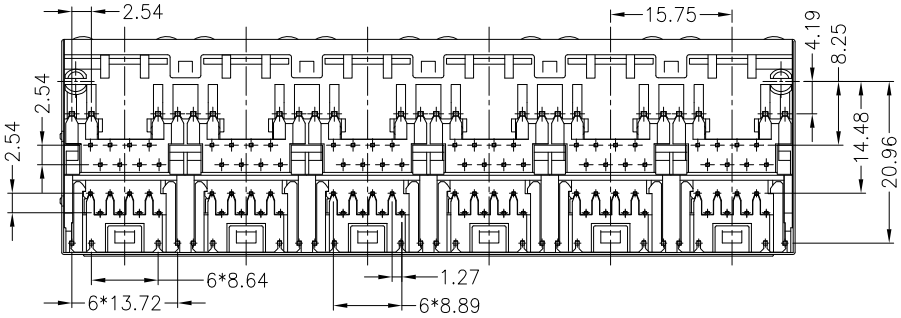

NOTES:
1.MATERIAL:
HOUSING:SEE ORDER INFORMATION BLACK(UL94V-0)
CONTACT:T=0.35mm PHOSPHOR BORNZE
SHELL:T=0.25mm BRASS.
2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDERTAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
3.OPERATING TEMPERTURE:-40°C~+85°C.
4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

P/N RULE:
JM6-C 5 1 U-4 6 0 Y

SHELL CODE
5:W/ TOP SPRING
W/ LOGO
W/O BACK LEG

1:HSG PBT

LED CODE
LEFT LED1: GREEN/ORANGE
LEFT LED2: GREEN/ORANGE
RIGHT LED1: GREEN
RIGHT LED2: GREEN

PLATING CODE
4-GOLD PLATED 6u"

DIM CODE
Contact PIN DIM A :3.18
LED PIN DIM B :3.18

0 : LED墓碑形
Y:一體式鐵殼

REV.	ECN. NO.	DRAWN	DATE
A	NEW	LIUBAO	05/30/2014
B	EN1410003	Liubao	10/23/2014
C	EN1411001	Liubao	11/11/2014

ECONN Technology
ECONN CORPORATION

HSF Compliant

ⓧ:QUALITY CONTROL ITEM	
APPROVED	
CHECKED	
DRAWN	

GENERAL TOLERANCE
.X± 0.38 X.°± 2°
.XX± 0.25 .X°± 1°
.XXX± 0.13

PART NO.: JM6-C51U-460Y
TITLE: RJ45 CONNECTOR JM 2X6 PORT W/LED, 8P8C, Shielded, Thru-Hole

UNIT: mm | SCALE: 1:1 | SHEET: 1/1 | REV.: C

SIZE: A4

說明: △ :備註 ◇ :版本變更 Ⓝ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

DOCUMENT NO. : ZER0013/A.2